

Data Sheet | UCS | DC Frame

DESCRIPTION

Semi-assembled Unlimited Creative Solutions (UCS) black-out pleated blind with pleated insect screen and side guiding channels for rattle-free use and installation on straight Horrex windows with aluminium Driving Change (DC) frame for inside recreational vehicles (RV's)



OPERATION

The pull bars of the blind (bottom-up) and insect screen (top-down) are connected with a clicker and are easily separable by hand for individual manual and step-less height adjustment

BLIND SIZES (WxH) WINDOW SIZES (WxH)

428 x 578 mm	350 x 500 mm
678 x 578 mm	600 x 500 mm
778 x 428 mm	700 x 350 mm
778 x 528 mm	700 x 450 mm
978 x 528 mm	900 x 450 mm
978 x 578 mm	900 x 500 mm
978 x 628 mm	900 x 550 mm
1,078 x 578 mm	1,000 x 500 mm
1,078 x 628 mm	1,000 x 550 mm
1,178 x 628 mm	1,100 x 550 mm
1,278 x 378 mm	1,200 x 300 mm
1,378 x 628 mm	1,300 x 550 mm
1,528 x 628 mm	1,450 x 550 mm
1,528 x 678 mm	1,450 x 600 mm

MATERIAL SPECIFICATIONS

Base profile

PVC extrusion 40 x 32 mm (HxD) in black (\pm RAL9005) with ventilation holes at the top and bottom

Cover profile

PVC extrusion 42.8 x 30.8 mm (HxD) and caps in cream (\pm RAL9001)

Pull bars

Extruded natural anodized aluminium 26.4 x 15 mm (HxD)

Black-out fabric

Fabric with 15 mm pleat consisting of non-woven white front and dirt repelling white PET backing with built-in insulating aluminium layer. Fabric thickness 0.3 mm. The blind cord runs behind the fabric panel through attached transparent guiders

Insect screen mesh

Black polyester yarn with 15 mm pleat and 1.3 x 1.3 mm mesh opening. Visible black cords through holes in the mesh

INSTALLATION

The system construction height is 36.4 mm. Suitable for Horrex windows with aluminium Driving Change (DC) frame (see drawing on next page). The considered mounting space for the width and height to the window (cut-out) size is 78 mm. Fit side channels to blind with provided screws. On face fixation of the blind with 4 screws of 3.5 x 25 mm

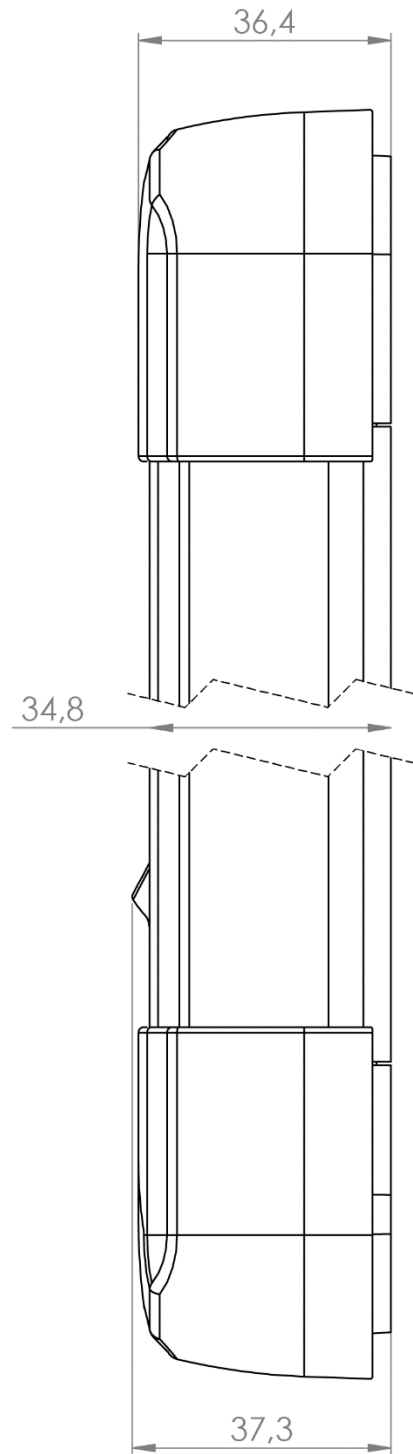
CLEANING

A soft damp cloth with mild detergent

PACKAGING

Individually with mounting set

Disclaimer | The specifications in this data sheet are for information purposes only and may be subject to change without prior notice
© Horrex 2021

CROSS SECTION DRAWING (MM)**FRAME TYPE**